




BLAYDE

TL5 

- A unique fully recessed, shallow, high efficiency TL5 luminaire.
- The parabolic reflector optic and micro-prismatic diffuser combine to give high Light Output Ratios (71% with acrylic diffuser) whilst providing an opalised blade of light.
- Versions with TP(a) PET diffusers are available for use in defined escape routes.
- Available in 3 and 4 lamp 600x600mm, and 2 lamp 1200x300 and 1200x600mm versions.

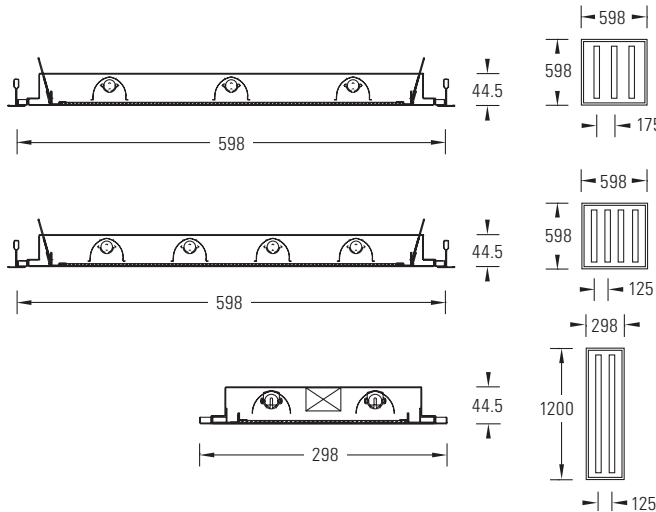

Lampway	Nom Dims (mm)	Catalogue No.	Weight (kg)	Emergency Catalogue No.	Weight (kg)
3x14W TL5	600x600	BLA/HF/314/MAP	5.7	BLA/HF/314E1/MAP	6.4
4x14W TL5	600x600	BLA/HF/414/MAP	5.8	BLA/HF/414E1/MAP	6.5
3x24W TL5	600x600	BLA/HF/324/MAP	5.7	BLA/HF/324E1/MAP	6.4
4x24W TL5	600x600	BLA/HF/424/MAP	5.8	BLA/HF/424E1/MAP	6.5
2x28W TL5	1200x300	BLA/HF/228/MAP	5.9	BLA/HF/228E1/MAP	6.6
2x54W TL5	1200x300	BLA/HF/254/MAP	5.9	BLA/HF/254E1/MAP	6.6

SPECIFICATION

Body:

Sturdy welded White polyester powder coated steel to suit exposed T as standard (can be installed by either draw up or lift and tilt method). Versions for concealed fix and plasterboard ceilings can be supplied to special order.

Spring retained diffuser frame.

Diffusers:

Micro-Prismatic Acrylic as standard
PET (TP(a)) Diffuser is available to special order.

To specify PET diffuser substitute suffix '**MPP**' into catalogue number:
e.g. BLA/HF/414/**MPP**

Reflectors:

Parabolic Miro 815 aluminium.

Control Gear:

HF High Frequency Electronic (standard)
HDP Philips 1-10V Analogue
HTCS Tridonic ECO Digital Switchdim
HDPT Philips Digital Touch and Dim
HTCD Tridonic ECO Digital DSI
HTXD Tridonic EXCEL one4all Digital DSI or DALI
HDPD Philips Digital DALI

To specify required option substitute relevant code into catalogue number:
e.g. BLA/**HTCS**/414/MAP

Emergency:

E1 Integral, maintained, 3-hour duration emergency lighting conversion packs are available for all options.

ES Self Test Emergency.

To specify required option substitute relevant code into catalogue number:
e.g. BLA/HF/224**ES**/MAP